Brake shown in standard mounting position

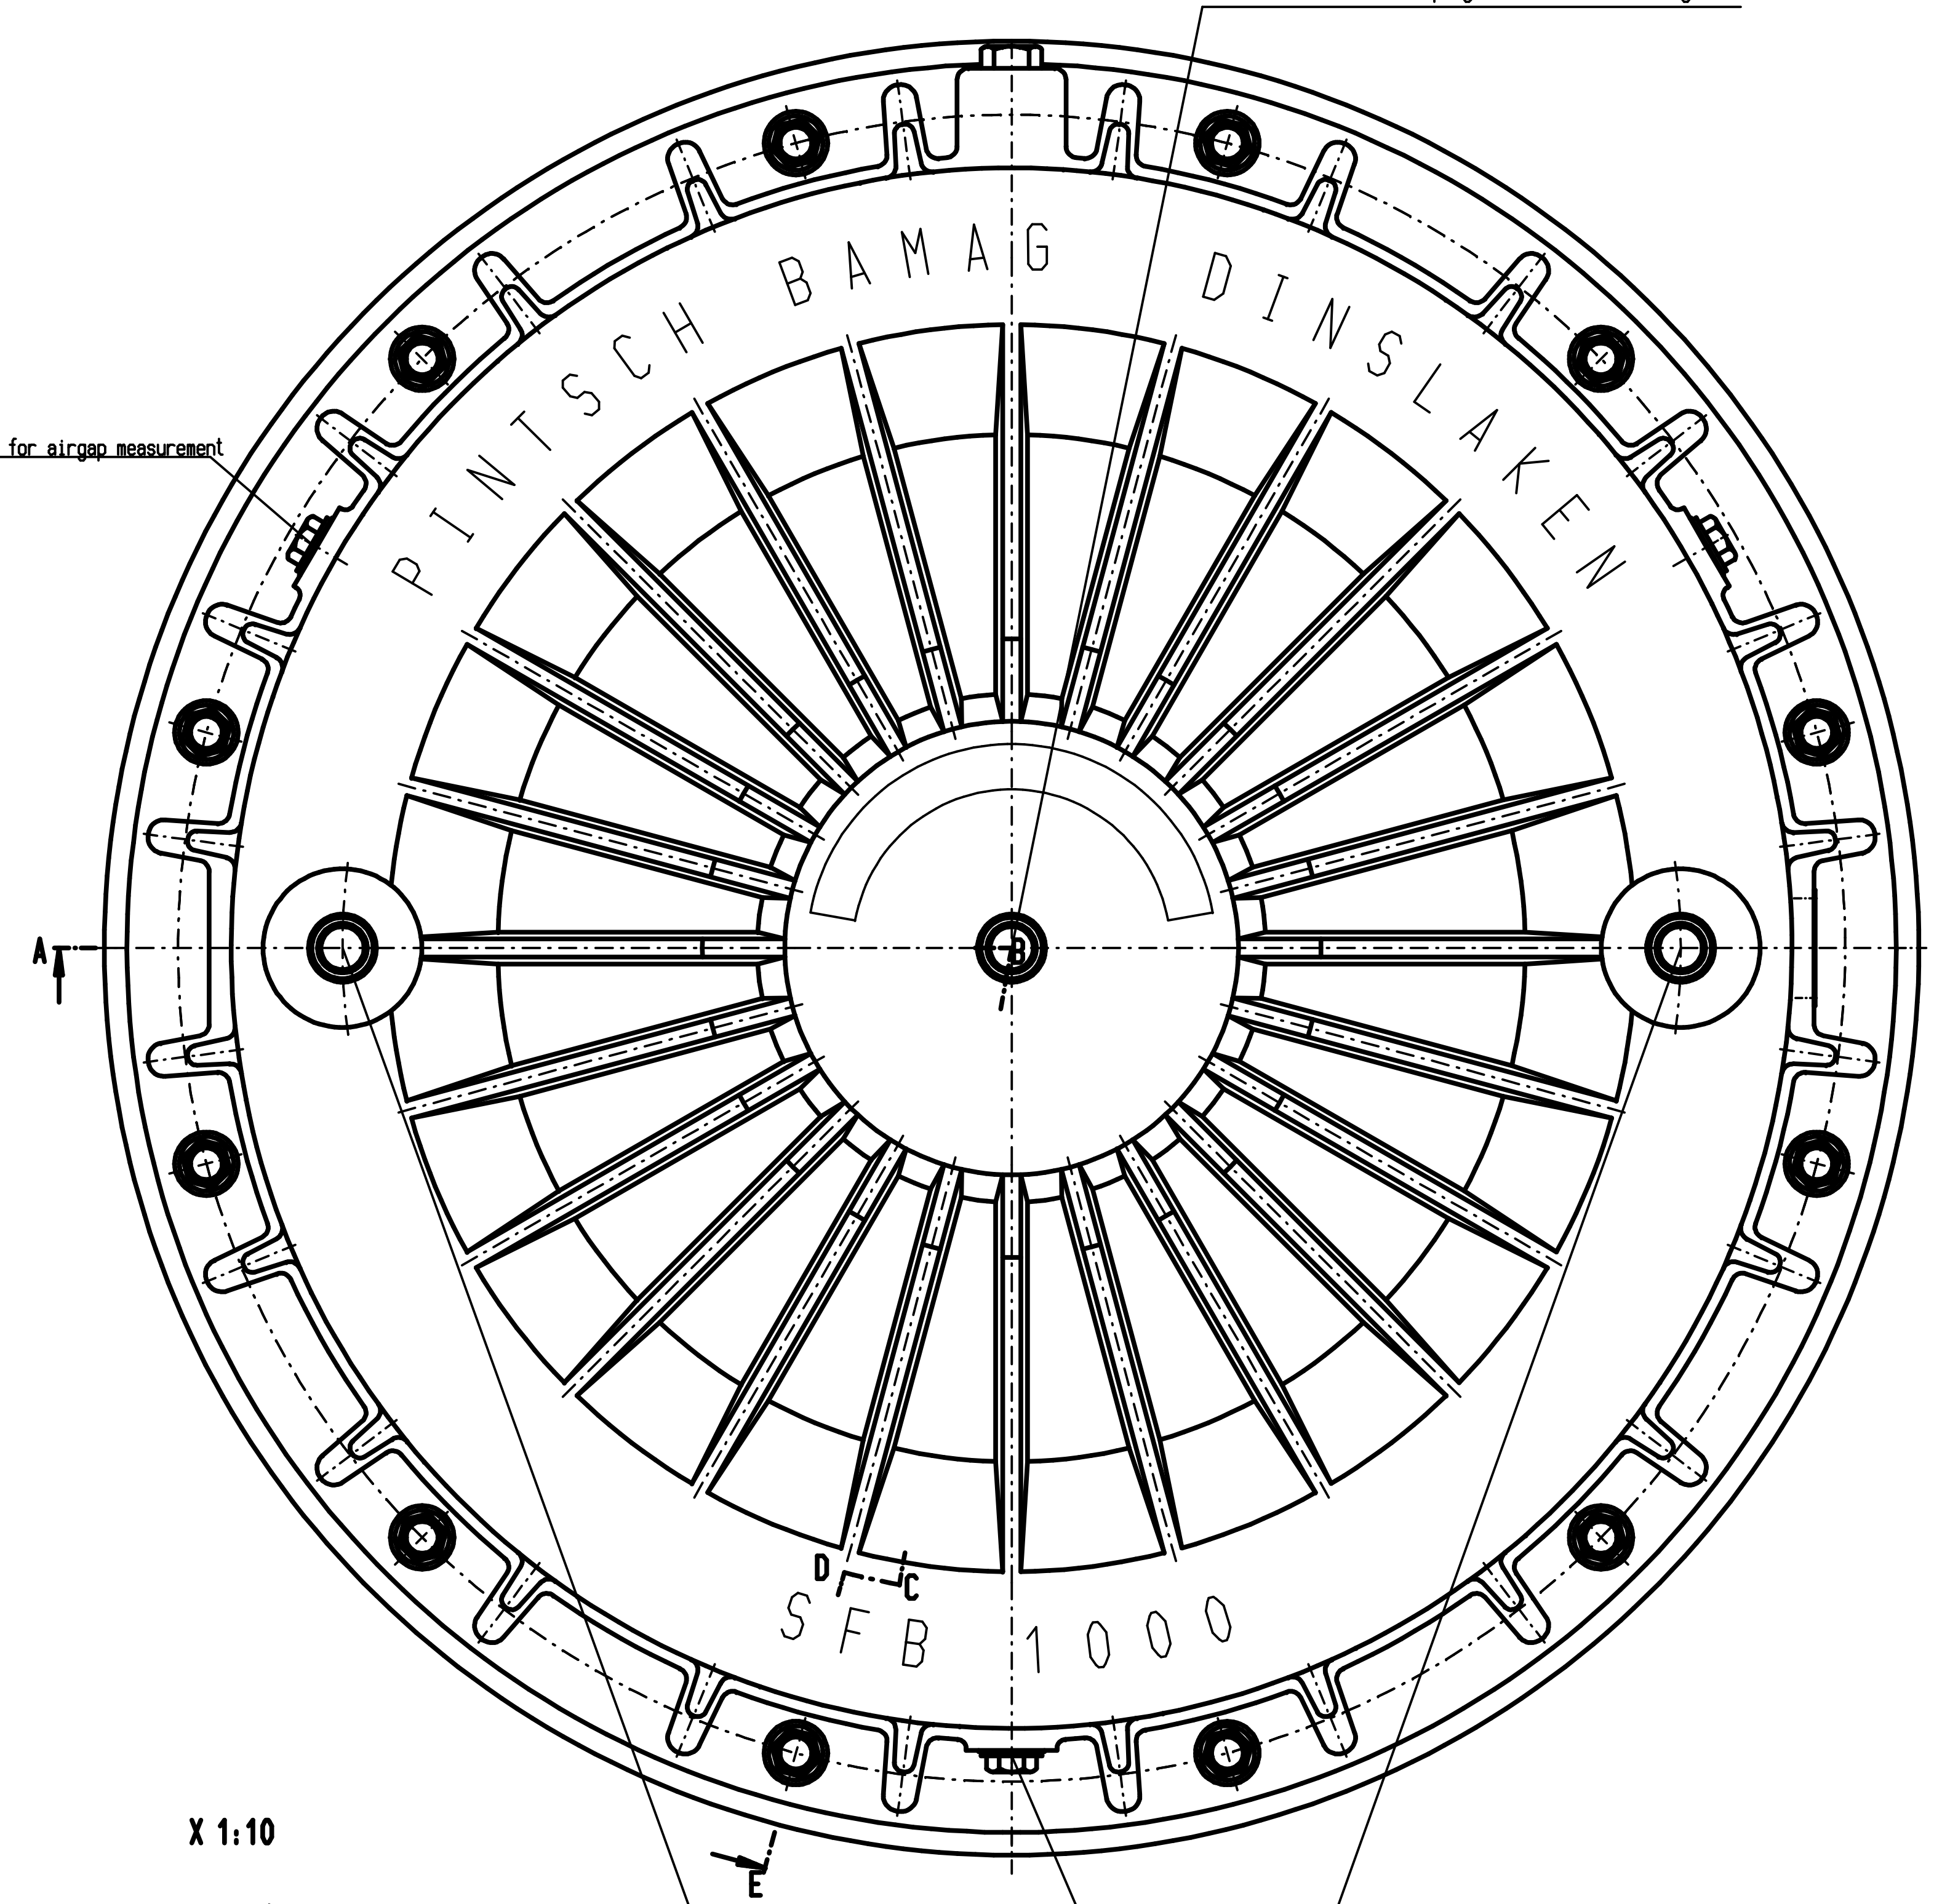

A-E

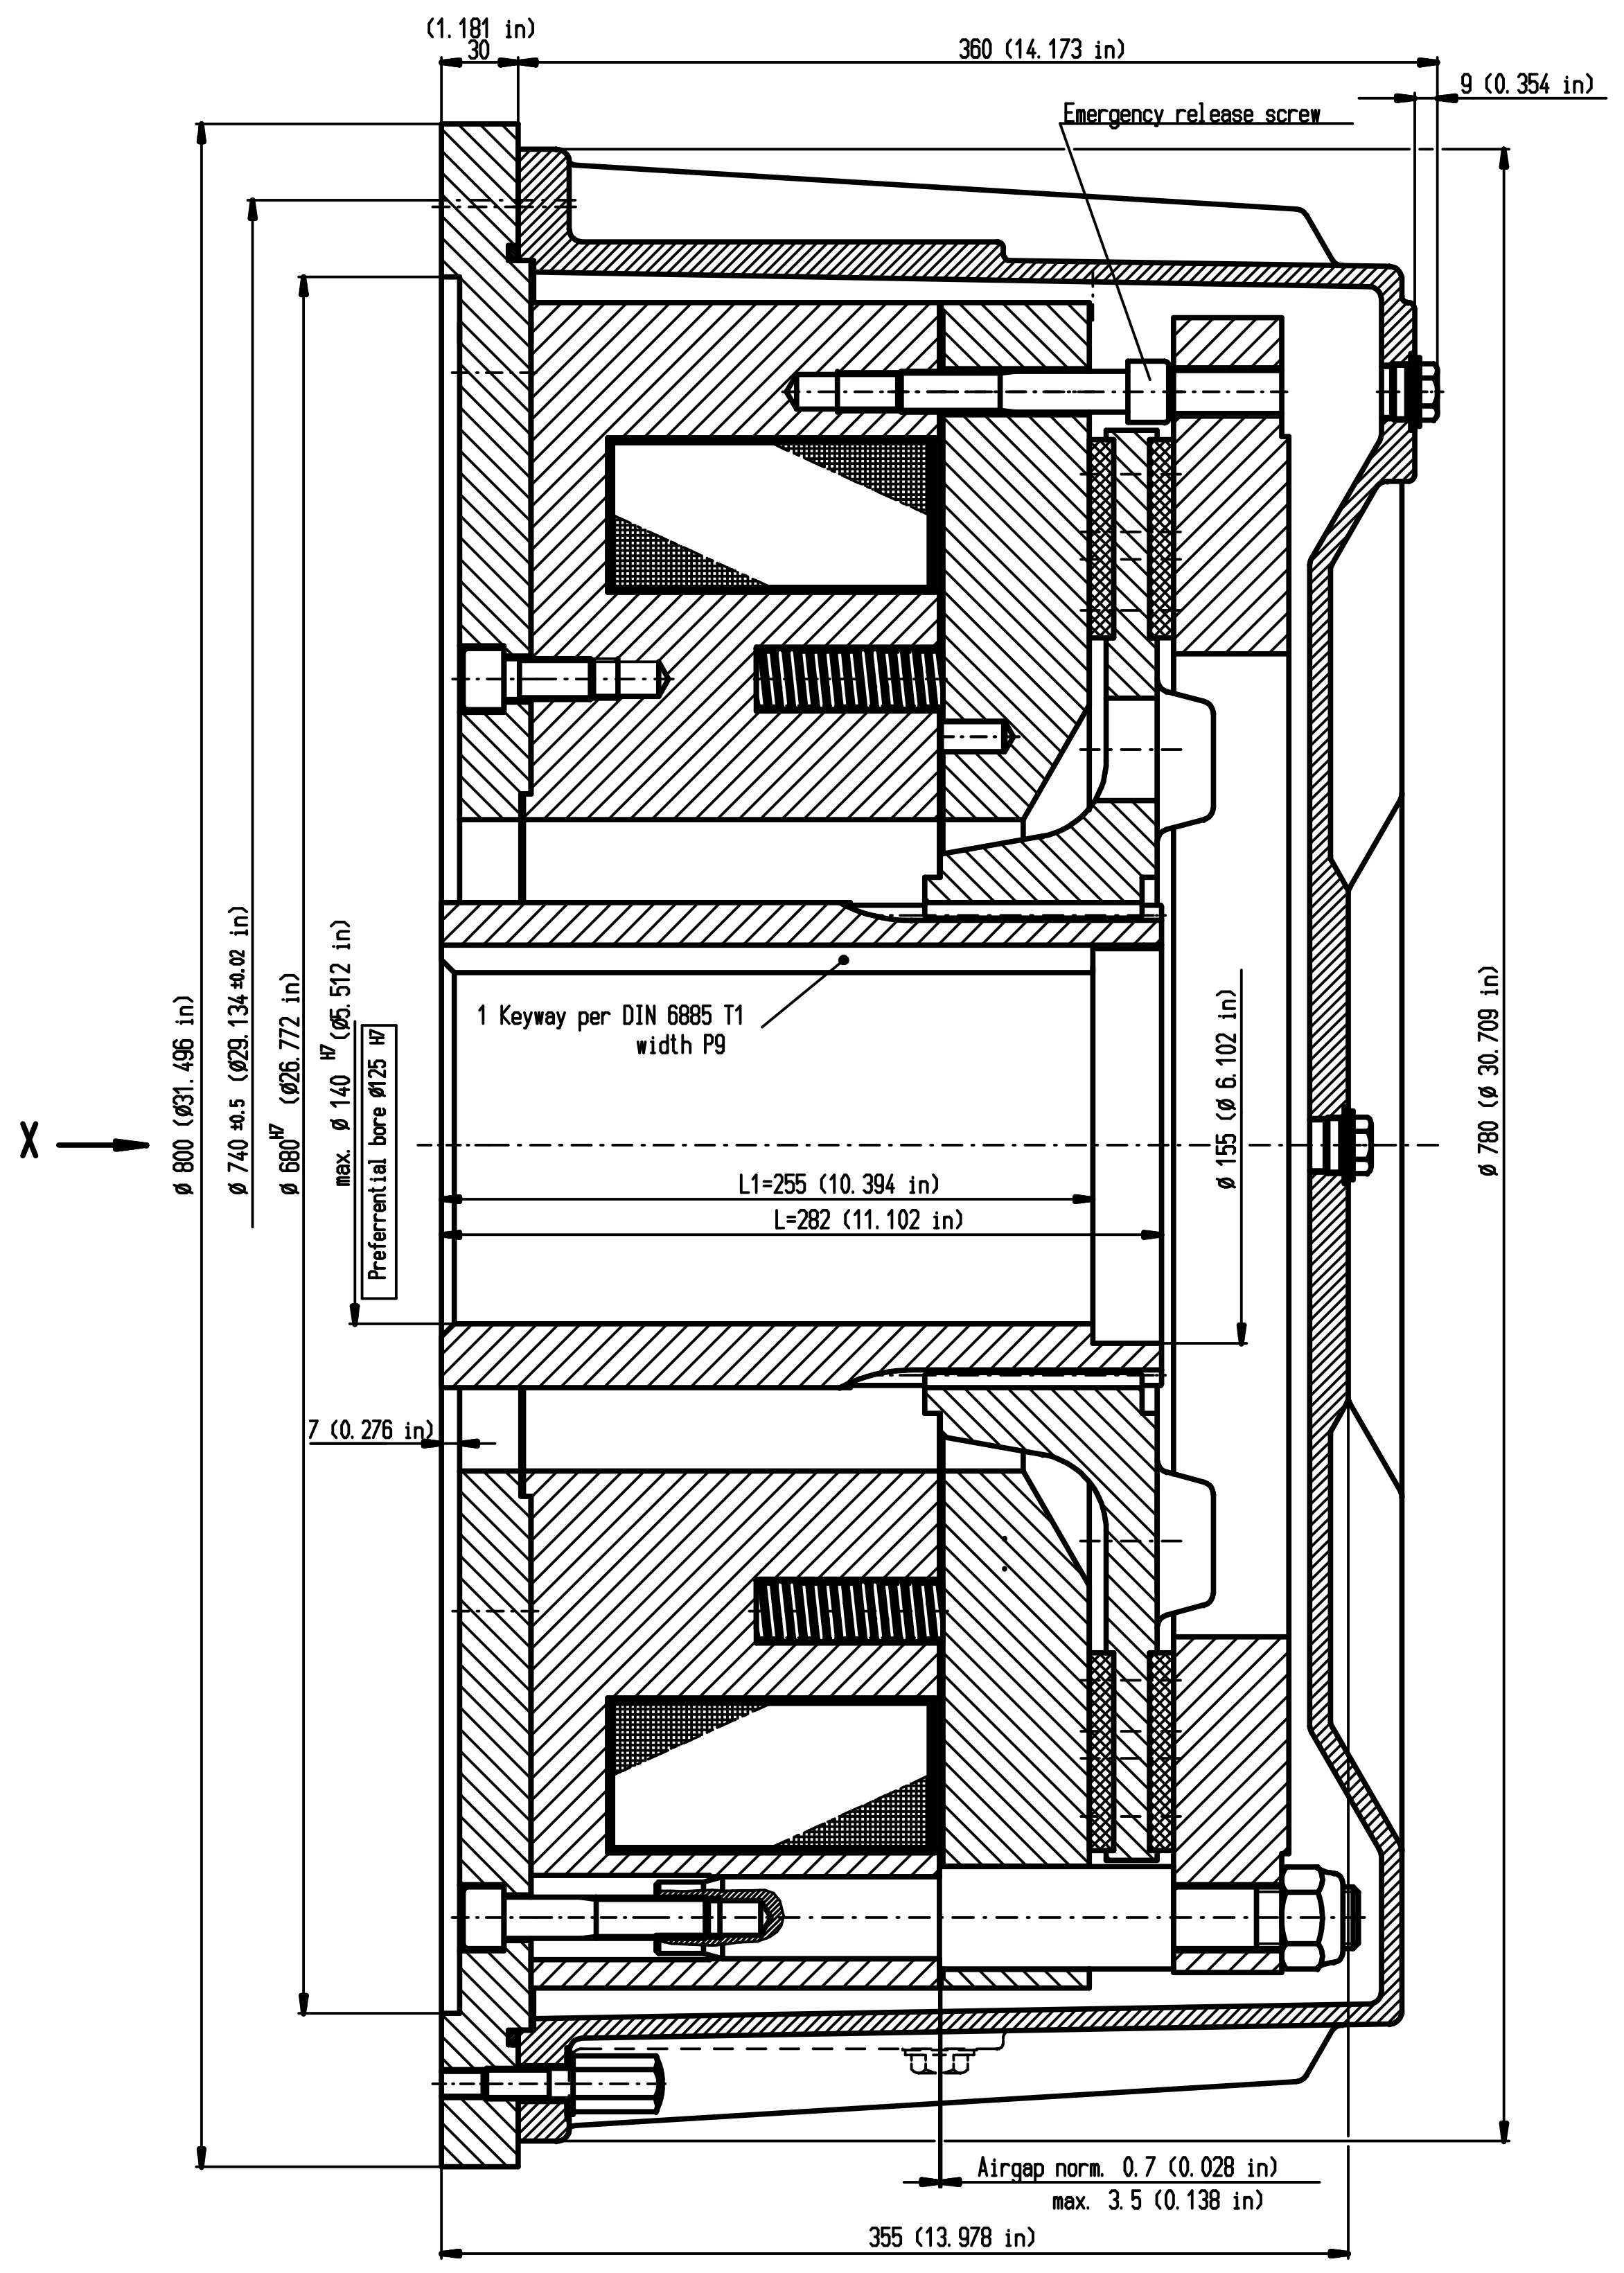

X 1:10

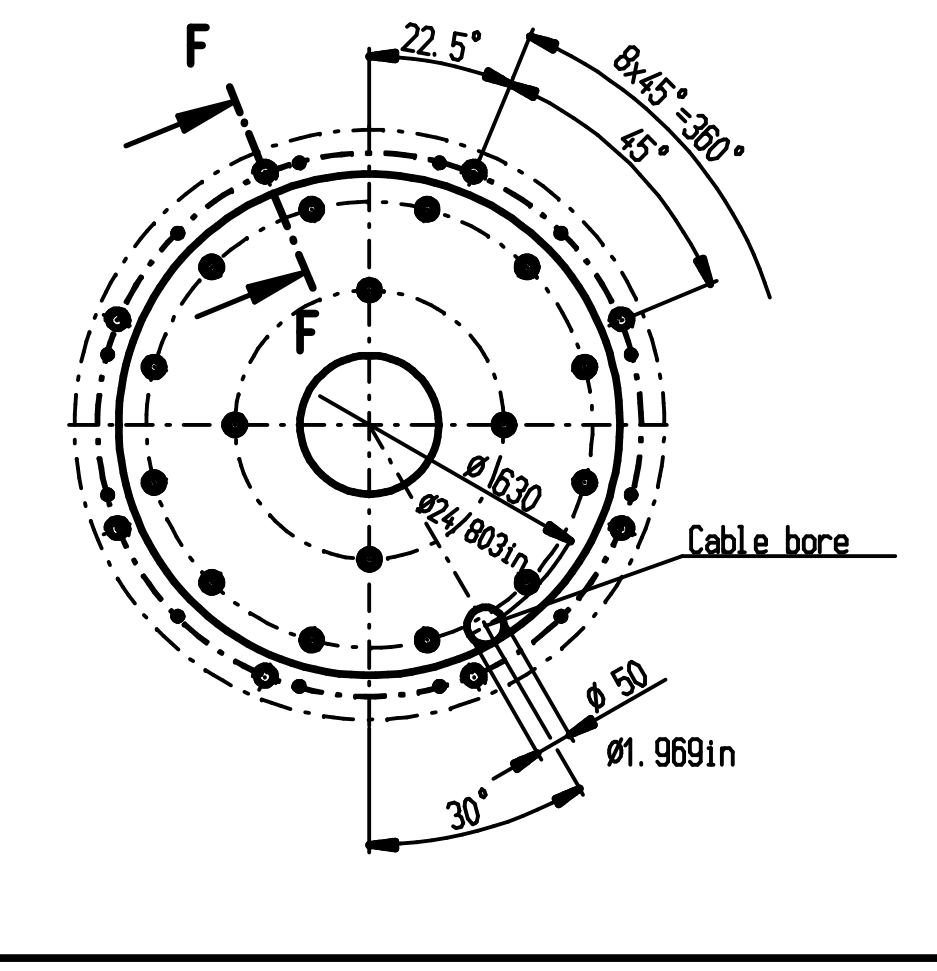

F-F



Subject to change without notice

Brake type	SFB 1000	
Switching brake torque (dynamic) per DIN VDE 0580	10000 Nm	7375.556 lb-ft
Coil class of rating per VDE 0530	S 1	S 1
Work capacity of the brake Diagramm #	000 560 300-960	000 560 300-960
Mass moment of inertia	1.007 kgm²	23.978 lb-ft²
Weight with flange A 800	750 kg	1653.473 lb
Standard voltage	110V DC	110V DC
Special voltage		
Coil capacity	980W	1.317 hp

Special flange, bore and voltage avaible at additional cost.
Intermediate flange A 800 Part# 000 618 600-214

Verwendbar fuer	Maße ohne Toleranzangabe: ISO 2768-mK	Oberflächen DIN ISO 1302	Ausgabe / Datum	
			Maßstab 1:2	Gewicht
		Datum	Name	Seewater-protected electromagnetic-brake
	Bearb.	19.02.2003	Vajic	SFB 1000
	Gepr.	04.03.2003	Thonen	Standard flange
	Norm			
	CAD: C:00001774.SZN		A1	
A 4-Vaj03002 20.02.2003 Vaj	PINTSCH BAMAG			000 617 150-951 — Blatt 01 — 01 Bl.
Zust. Änderung Datum Name	Urspr. MEDUSA 27.4.98			Ers. f.: — Ers. d.:

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten. © PINTSCH BAMAG Antriebs- und Verkehrstechnik GmbH, Dinslaken